

Acier Zn

33 342


DIN 7504 M - (similar ISO 15481)

VIS AUTOPERCEUSES TETE CYLINDRIQUE SIX LOBES

SIX LOBE PAN HEAD SELF DRILLING SCREWS

BOHRSCHRAUBEN MIT LINSENKOPF UND INNENSECHSRUND

TORNILLOS AUTOTALADRANTES CABEZA CILINDRICA SEIS LOBULADOS

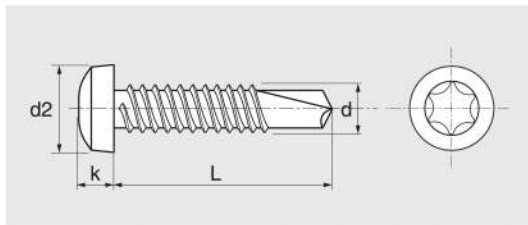

d	3,5 (6)	3,9 (7)	4,2 (8)	4,8 (10)	5,5 (12)	6,3 (14)
d2	6,9	7,5	8,2	9,5	10,8	12,5
k	2,6	2,8	3,05	3,55	3,95	4,55
⊙	15	15	20	25	25	30
Capacité de perçage	2,25	2,4	3	4,4	5,25	6

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
3,5X9,5	333423,5X9,5CR3	500	0,104	4,8X22	333424,8X22CR3	500	0,335
3,5X13	333423,5X13CR3	500	0,119	4,8X25	333424,8X25CR3	250	0,384
3,5X16	333423,5X16CR3	500	0,132	4,8X32	333424,8X32CR3	250	0,408
3,5X19	333423,5X19CR3	500	0,144	4,8X38	333424,8X38CR3	250	0,491
3,5X22	333423,5X22CR3	500	0,157	4,8X45	333424,8X45CR3	250	0,500
3,5X25	333423,5X25CR3	500	0,162	4,8X50	333424,8X50CR3	250	0,589
3,5X32	333423,5X32CR3	500	0,185	4,8X60	333424,8X60CR3	250	0,671
3,5X38	333423,5X38CR3	500	0,225	4,8X70	333424,8X70CR3	250	0,754
3,9X9,5	333423,9X9,5CR3	500	0,108	4,8X80	333424,8X80CR3	250	0,880
3,9X13	333423,9X13CR3	500	0,128	5,5X19	333425,5X19CR3	250	0,456
3,9X16	333423,9X16CR3	500	0,148	5,5X22	333425,5X22CR3	250	0,489
3,9X19	333423,9X19CR3	500	0,167	5,5X25	333425,5X25CR3	250	0,521
3,9X22	333423,9X22CR3	500	0,172	5,5X32	333425,5X32CR3	250	0,480
3,9X25	333423,9X25CR3	500	0,205	5,5X38	333425,5X38CR3	250	0,580
3,9X32	333423,9X32CR3	500	0,228	5,5X45	333425,5X45CR3	250	0,730
3,9X38	333423,9X38CR3	500	0,260	5,5X50	333425,5X50CR3	250	0,731
4,2X9,5	333424,2X9,5CR3	500	0,147	5,5X60	333425,5X60CR3	250	0,905
4,2X13	333424,2X13CR3	500	0,183	5,5X70	333425,5X70CR3	250	1,014
4,2X16	333424,2X16CR3	500	0,201	5,5X80	333425,5X80CR3	250	1,123
4,2X19	333424,2X19CR3	500	0,190	6,3X19	333426,3X19CR3	250	0,500
4,2X22	333424,2X22CR3	500	0,239	6,3X22	333426,3X22CR3	250	0,547
4,2X25	333424,2X25CR3	500	0,257	6,3X25	333426,3X25CR3	250	0,623
4,2X32	333424,2X32CR3	500	0,263	6,3X32	333426,3X32CR3	250	0,724
4,2X38	333424,2X38CR3	500	0,324	6,3X38	333426,3X38CR3	250	0,812
4,2X45	333424,2X45CR3	500	0,382	6,3X45	333426,3X45CR3	250	1,024
4,2X50	333424,2X50CR3	500	0,414	6,3X50	333426,3X50CR3	250	1,042
4,8X13	333424,8X13CR3	500	0,221	6,3X60	333426,3X60CR3	250	1,165
4,8X16	333424,8X16CR3	500	0,310	6,3X70	333426,3X70CR3	250	1,362
4,8X19	333424,8X19CR3	500	0,335	6,3X80	333426,3X80CR3	250	1,550



Informations d'utilisation voir page 43 / Using instructions : see page 43