

Acier Zn

33 351


DIN 7504 O - (similar ISO 15482)

VIS AUTOPERCEUSES TETE FRAISEE CARREE

SQUARE COUNTERSUNK HEAD SELF DRILLING SCREWS

BOHRSCHRAUBEN MIT SENNKOPF UND INNENVIERKANT

TORNILLOS AUTOTALADRANTES CABEZA AVELLANADA CUADRADA

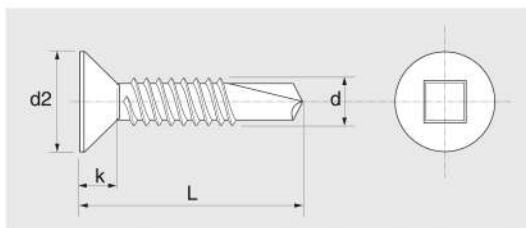

d	3,5 (6)	3,9 (7)	4,2 (8)	4,8 (10)
d2	6,8	7,5	8,1	9,5
k	2,1	2,3	2,5	3
⌀	1	2	2	2
Capacité de perçage	2,25	2,4	3	4,4

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
3,5X13	333513,5X13CR3	500	0,073	4,2X32	333514,2X32CR3	500	0,238
3,5X16	333513,5X16CR3	500	0,085	4,2X38	333514,2X38CR3	500	0,264
3,5X19	333513,5X19CR3	500	0,098	4,2X50	333514,2X50CR3	500	0,339
3,9X13	333513,9X13CR3	500	0,092	4,8X19	333514,8X19CR3	500	0,187
3,9X16	333513,9X16CR3	500	0,110	4,8X25	333514,8X25CR3	250	0,237
3,9X19	333513,9X19CR3	500	0,126	4,8X32	333514,8X32CR3	250	0,330
3,9X25	333513,9X25CR3	500	0,164	4,8X38	333514,8X38CR3	250	0,344
3,9X32	333513,9X32CR3	500	0,200	4,8X45	333514,8X45CR3	250	0,401
3,9X38	333513,9X38CR3	500	0,249	4,8X50	333514,8X50CR3	250	0,442
4,2X16	333514,2X16CR3	500	0,127	4,8X60	333514,8X60CR3	250	0,524
4,2X19	333514,2X19CR3	500	0,146	4,8X70	333514,8X70CR3	250	0,606
4,2X22	333514,2X22CR3	500	0,164	4,8X80	333514,8X80CR3	250	0,689
4,2X25	333514,2X25CR3	500	0,183				



Informations d'utilisation voir page 43 / Using instructions : see page 43