

Laiton

54 500


DIN 963 - (similar ISO 2009, NFE 25-123, UNI 6109)

VIS A METAUX TETE FRAISEE FENDUE

SLOTTED COUNTERSUNK HEAD MACHINE SCREWS - BRASS

SENKSCRAUBEN MIT SCHLITZ - MESSING

TORNILLOS CABEZA AVELLANADA RANURADA - LATON

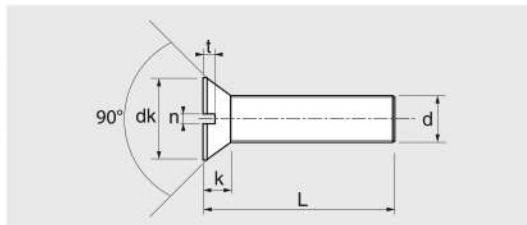

d	M 3	M 4	M 5	M 6	M 8
dk	5,6	7,5	9,2	11	14,5
k	1,65	2,2	2,5	3	4
n	0,8	1	1,2	2	2
t	0,6	0,8	1	1,2	1,6
Pas	0,5	0,7	0,8	1	1,25

d x L	Code	Cond.	kg/100
3X10	545003X10	100	0,057
3X16	545003X16	100	0,090
3X20	545003X20	100	0,110
3X25	545003X25	100	0,133
3X30	545003X30	100	0,157
4X16	545004X16	100	0,167
4X20	545004X20	100	0,200
4X25	545004X25	100	0,240
4X30	545004X30	100	0,284
4X40	545004X40	100	0,360
5X16	545005X16	100	0,266
5X20	545005X20	100	0,320
5X25	545005X25	100	0,380
5X30	545005X30	100	0,450
5X40	545005X40	100	0,580

d x L	Code	Cond.	kg/100
5X50	545005X50	100	0,720
6X20	545006X20	100	0,438
6X25	545006X25	100	0,506
6X30	545006X30	100	0,660
6X40	545006X40	100	0,850
6X50	545006X50	50	1,050
6X60	545006X60	50	1,250
8X20	545008X20	100	0,846
8X25	545008X25	100	1,046
8X30	545008X30	100	1,203
8X35	545008X35	100	1,362
8X40	545008X40	100	1,515
8X45	545008X45	100	1,758
8X50	545008X50	100	1,942