

Inox A2

62 436


DIN 7504 O - (similar ISO 15482)

VIS AUTOPERCEUSES TETE FRAISEE SIX LOBES

SIX LOBE COUNTERSUNK HEAD SELF DRILLING SCREWS

BOHRSCHRAUBEN MIT SENKKOPF UND INNENSECHSRUND

TORNILLOS AUTOTALADRANTES CABEZA AVELLANADAS SEIS LOBULADOS

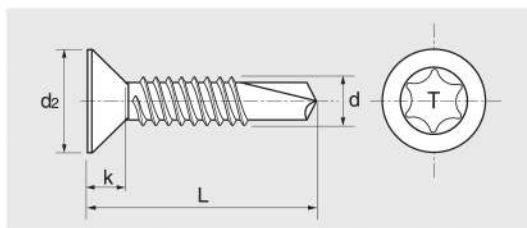

d	3,5 (6)	3,9 (7)	4,2 (8)	4,8 (10)	5,5 (12)
d2	6,8	7,5	8,1	9,5	10,8
k	2,1	2,3	2,5	3	3,4
⊙	10	15	20	25	25
Capacité de perçage	2	2	3	4	5

d x L	Code	Cond.	kg/100
3,5X9,5	624363,5X9,5	200	0,070
3,5X13	624363,5X13	200	0,073
3,5X16	624363,5X16	200	0,085
3,5X19	624363,5X19	200	0,098
3,5X25	624363,5X25	200	0,124
3,5X32	624363,5X32	200	0,162
3,5X38	624363,5X38	200	0,172
3,9X13	624363,9X13	200	0,095
3,9X16	624363,9X16	200	0,117
3,9X19	624363,9X19	200	0,139
3,9X22	624363,9X22	200	0,139
3,9X25	624363,9X25	200	0,171
3,9X32	624363,9X32	200	0,198
3,9X38	624363,9X38	200	0,248
4,2X13	624364,2X13	200	0,146
4,2X16	624364,2X16	200	0,127
4,2X19	624364,2X19	200	0,146
4,2X22	624364,2X22	200	0,158
4,2X25	624364,2X25	200	0,183
4,2X32	624364,2X32	200	0,266
4,2X38	624364,2X38	200	0,264

d x L	Code	Cond.	kg/100
4,2X45	624364,2X45	200	0,358
4,2X50	624364,2X50	200	0,360
4,8X13	624364,8X13	200	0,160
4,8X16	624364,8X16	200	0,163
4,8X19	624364,8X19	200	0,187
4,8X22	624364,8X22	200	0,217
4,8X25	624364,8X25	200	0,237
4,8X32	624364,8X32	200	0,333
4,8X38	624364,8X38	200	0,344
4,8X45	624364,8X45	200	0,401
4,8X50	624364,8X50	200	0,442
4,8X60	624364,8X60	200	0,524
4,8X70	624364,8X70	200	0,800
4,8X80	624364,8X80	200	0,805
5,5X19	624365,5X19	200	0,255
5,5X25	624365,5X25	200	0,320
5,5X32	624365,5X32	200	0,456
5,5X38	624365,5X38	200	0,461
5,5X45	624365,5X45	200	0,538
5,5X50	624365,5X50	200	0,588
5,5X60	624365,5X60	200	0,697



Perce seulement l'aluminium / Drills only aluminium

Informations d'utilisation voir page 43 / Using instructions : see page 43