

AISI 410

62 442


DIN 7504 O - (similar ISO 15482)

## VIS AUTOPERCEUSES TETE FRAISEE CARREE

SQUARE COUNTERSUNK HEAD SELF DRILLING SCREWS

BOHRSCHRAUBEN MIT SENKKOPF UND INNENVIERKANT

TORNILLOS AUTOTALADRANTES CABEZA AVELLANADA CUADRADA

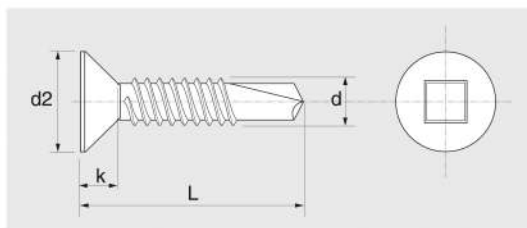

d	4,2 (8)	4,8 (10)
d2	8,1	9,5
k	2,5	3
●	2	2
Capacité de perçage	3	4

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
4,2X16	624424,2X16	200	0,127	4,8X32	624424,8X32	200	0,333
4,2X19	624424,2X19	200	0,146	4,8X38	624424,8X38	200	0,344
4,2X25	624424,2X25	200	0,183	4,8X50	624424,8X50	200	0,442
4,2X32	624424,2X32	200	0,238	4,8X60	624424,8X60	200	0,605
4,8X19	624424,8X19	200	0,187	4,8X70	624424,8X70	200	0,705
4,8X25	624424,8X25	200	0,237				



Perce l'acier / Drills steel

Aspect argent dû au traitement améliorant la tenue à la corrosion qui demeure inférieure à l'A2

Silver aspect due to treatment for enhancing corrosion resistance which is lower than A2

Informations d'utilisation voir page 43 / Using instructions : see page 43