

AISI 410

62 443


DIN 7504 M - (similar ISO 15481)

VIS AUTOPERCEUSES TETE CYLINDRIQUE CARREE

SQUARE PAN HEAD SELF DRILLING SCREWS

BOHRSCHRAUBEN MIT LINSKOPF UND INNENVIERKANT

TORNILLOS AUTOTALADRANTES CABEZA CILINDRICA CUADRADA

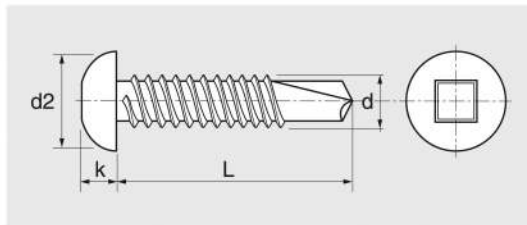

d	3,9 (7)	4,2 (8)	4,8 (10)
d2	7,5	8,2	9,5
k	2,8	3,05	3,55
●	2	2	2
Capacité de perçage	2	3	4

d x L	Code	Cond.	kg/100
3,9X13	624433,9X13	200	0,136
3,9X16	624433,9X16	200	0,160
3,9X19	624433,9X19	200	0,178
3,9X25	624433,9X25	200	0,208
3,9X32	624433,9X32	200	0,235
4,2X13	624434,2X13	200	0,183
4,2X16	624434,2X16	200	0,170
4,2X19	624434,2X19	200	0,190
4,2X25	624434,2X25	200	0,257

d x L	Code	Cond.	kg/100
4,2X32	624434,2X32	200	0,264
4,2X38	624434,2X38	200	0,298
4,8X16	624434,8X16	200	0,310
4,8X19	624434,8X19	200	0,335
4,8X25	624434,8X25	200	0,384
4,8X32	624434,8X32	200	0,396
4,8X38	624434,8X38	200	0,491
4,8X50	624434,8X50	200	0,589

Perce l'acier / Drills steel



Aspect argent dû au traitement améliorant la tenue à la corrosion qui demeure inférieure à l'A2
 Silver aspect due to treatment for enhancing corrosion resistance which is lower than A2
 Informations d'utilisation voir page 43 / Using instructions : see page 43