

Inox A2

62641


DIN 934 - (similar ISO 4032, NFE 25-401, UNI 5588)

ECROUS HEXAGONAUX LUBRIFIES

WAXED HEXAGON NUTS

GESCHMIERTE SECHSKANTMUTTERN

TUERCAS HEXAGONALES LUBRIFICADAS

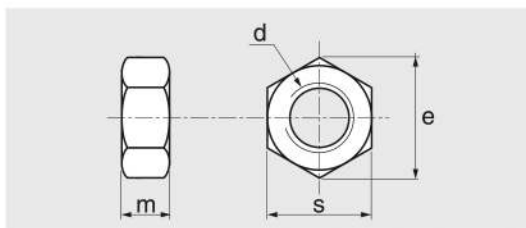

d nominal	Code	Pas	e	m	s	Cond.	kg/100
M 6	626416	1	11,05	5	10	200	0,251
M 8	626418	1,25	14,38	6,5	13	200	0,539
M 10	6264110	1,5	18,9	8	17	100	1,185



ISO 4032

Ø 10 S=16 - Ø 12 S=18 - Ø 14 S=21

M 12	6264112	1,75	21,1	10	19	100	1,761
M 14	6264114	2	24,49	11	22	50	2,517
M 16	6264116	2	26,75	13	24	50	3,381
M 18	6264118	2,5	29,56	15	27	50	4,757
M 20	6264120	2,5	32,95	16	30	25	6,330
M 24	6264124	3	39,55	19	36	25	9,800



Notre procédé améliore nettement le coefficient de frottement, ce qui réduit le risque de grippage
Our process really improves the coefficient of friction which reduces the risk of thread galling