

Inox A2

62801


TYPE DIN 7991 - (ISO 10642, UNI 5933)

VIS TETE FRAISEE SIX PANS CREUX INVIOLEABLE AVEC TETON CENTRAL

HEXAGON SOCKET COUNTERSUNK HEAD SECURITY SCREWS WITH PIN

SENKSCRAUBEN MIT INNENSECHSKANT UND SICHERHEITSSTIFT

TORNILLOS DE SEGURIDAD INVIOLEABLES CABEZA AVELLANADA HEXOGONO INTERIOR CON ESPIGA

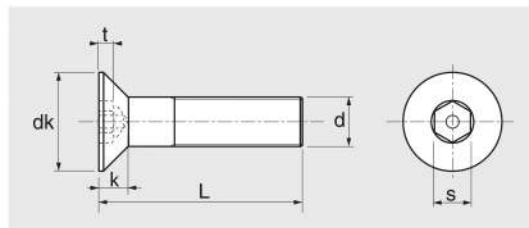

d	M 3	M 4	M 5	M 6	M 8	M 10
dk	6	8	10	12	16	20
k	1,7	2,3	2,8	3,3	4,4	5,5
s	2	2,5	3	4	5	6
t	1,2	1,6	2,3	3	3,2	4,4
embout/bit	360652	360652,5	360653	360654	360655	360656
clé/key	360852	360852,5	360853	360854	360855	360856

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
3X6	628013X6	100	0,042	6X25	628016X25	100	0,556
3X8	628013X8	100	0,051	6X30	628016X30	100	0,642
3X10	628013X10	100	0,059	6X35	628016X35	100	0,732
3X12	628013X12	100	0,068	6X40	628016X40	100	0,889
3X16	628013X16	100	0,085	6X50	628016X50	100	1,104
3X20	628013X20	100	0,103	8X12	628018X12	50	0,658
4X10	628014X10	100	0,114	8X16	628018X16	50	0,783
4X12	628014X12	100	0,130	8X20	628018X20	50	0,913
4X16	628014X16	100	0,160	8X25	628018X25	50	1,120
4X20	628014X20	100	0,191	8X30	628018X30	50	1,225
4X25	628014X25	100	0,229	8X35	628018X35	50	1,330
4X30	628014X30	100	0,288	8X40	628018X40	50	1,543
5X10	628015X10	100	0,193	8X45	628018X45	50	1,699
5X12	628015X12	100	0,218	8X50	628018X50	50	2,012
5X16	628015X16	100	0,266	8X60	628018X60	50	2,396
5X20	628015X20	100	0,317	10X16	6280110X16	50	1,210
5X25	628015X25	100	0,377	10X20	6280110X20	50	1,410
5X30	628015X30	100	0,437	10X25	6280110X25	50	1,660
5X40	628015X40	100	0,612	10X30	6280110X30	50	1,910
6X10	628016X10	100	0,293	10X35	6280110X35	50	2,160
6X12	628016X12	100	0,330	10X40	6280110X40	50	2,410
6X16	628016X16	100	0,399	10X50	6280110X50	50	3,010
6X20	628016X20	100	0,470	10X60	6280110X60	50	3,570



Embout (Bit) / Clé (Key) : voir chapitre / see chapter: Industrie