


Inox A2

62 805
TYPE ISO 7380VIS A METAUX TETE BOMBEE SIX LOBES INVIOLEABLE
AVEC TETON CENTRAL

METRIC THREAD BUTTON HEAD SIX LOBE RECESS SECURITY SCREWS WITH PIN

LINSEN SICHERUNGSSCHRAUBEN MIT INNENSECHSRUND

TORNILLOS DE SEGURIDAD INVIOLEABLES CABEZA ABOMBADA SEIS LOBULADOS CON EPIGA

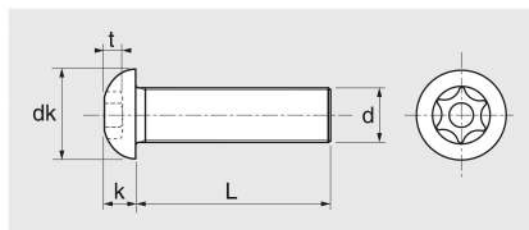

d	M 3	M 4	M 5	M 6	M 8	M 10
dk	5,7	7,6	9,5	10,5	14	17,5
k	1,7	2,2	2,75	3,3	4,4	5,5
t	0,96	1,43	2	2	3,2	3,5
embout/bit	3604510	3604520	3604525	3604530	3604540	3604545
clé/key	3608610	3608620	3608625	3608630	3608640	3608645

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
3X6	628053X6	100	0,044	6X12	628056X12	100	0,336
3X8	628053X8	100	0,052	6X16	628056X16	100	0,393
3X10	628053X10	100	0,061	6X20	628056X20	100	0,462
3X12	628053X12	100	0,069	6X25	628056X25	100	0,552
3X16	628053X16	100	0,087	6X30	628056X30	100	0,641
3X20	628053X20	100	0,104	6X35	628056X35	100	0,750
4X8	628054X8	100	0,113	6X40	628056X40	100	0,809
4X10	628054X10	100	0,122	6X50	628056X50	100	0,984
4X12	628054X12	100	0,138	6X60	628056X60	100	1,180
4X16	628054X16	100	0,162	8X12	628058X12	50	0,350
4X20	628054X20	100	0,188	8X16	628058X16	50	0,833
4X25	628054X25	100	0,226	8X20	628058X20	50	0,951
4X30	628054X30	100	0,265	8X25	628058X25	50	1,200
4X40	628054X40	100	0,368	8X30	628058X30	50	1,253
5X10	628055X10	100	0,210	8X40	628058X40	50	1,546
5X12	628055X12	100	0,233	8X50	628058X50	50	1,869
5X16	628055X16	100	0,279	8X60	628058X60	50	2,185
5X20	628055X20	100	0,328	10X20	6280510X20	50	1,632
5X25	628055X25	100	0,385	10X25	6280510X25	50	1,930
5X30	628055X30	100	0,447	10X30	6280510X30	50	2,170
5X40	628055X40	100	0,562	10X40	6280510X40	50	2,626
5X50	628055X50	100	0,687	10X50	6280510X50	50	3,124
5X60	628055X60	100	0,802	10X60	6280510X60	50	3,583
6X10	628056X10	100	0,300	10X70	6280510X70	50	4,147



Embout (Bit) / Clé (Key) : voir chapitre / see chapter: Industrie