

Inox A2

62 806


TYPE DIN 7991 - (ISO 10642, UNI 5933)

VIS A METAUX TETE FRAISEE SIX LOBES INVIOLEABLE AVEC TETON CENTRAL

METRIC THREAD FLAT HEAD SIX LOBE RECESS SECURITY SCREWS WITH PIN

SENK SICHERUNGSSCHRAUBEN MIT INNENSECHSRUND

TORNILLOS DE SEGURIDAD INVIOLEABLES CABEZA AVELLANADA SEIS LOBULADOS CON ESPIGA

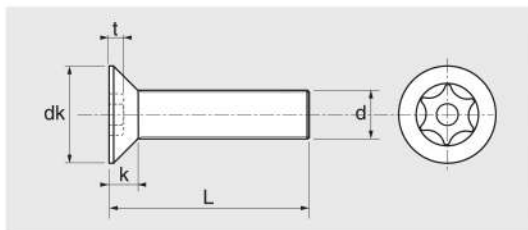

d	M 3	M 4	M 5	M 6
dk	5,8	7,9	9,9	11,65
k	1,7	2,3	2,8	3,3
t	1,25	1,4	2	2,2
embout/bit	3604510	3604520	3604525	3604530
clé/key	3608610	3608620	3608625	3608630

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
3X6	628063X6	100	0,042	5X16	628065X16	100	0,266
3X8	628063X8	100	0,051	5X20	628065X20	100	0,317
3X10	628063X10	100	0,059	5X25	628065X25	100	0,377
3X12	628063X12	100	0,068	5X30	628065X30	100	0,437
3X16	628063X16	100	0,085	5X40	628065X40	100	0,612
3X20	628063X20	100	0,103	5X50	628065X50	100	0,760
4X10	628064X10	100	0,114	5X60	628065X60	100	0,909
4X12	628064X12	100	0,130	5X70	628065X70	100	1,058
4X16	628064X16	100	0,160	6X12	628066X12	100	0,330
4X20	628064X20	100	0,191	6X16	628066X16	100	0,399
4X25	628064X25	100	0,229	6X20	628066X20	100	0,470
4X30	628064X30	100	0,288	6X25	628066X25	100	0,556
4X40	628064X40	100	0,390	6X30	628066X30	100	0,642
4X50	628064X50	100	0,480	6X40	628066X40	100	0,889
5X10	628065X10	100	0,193	6X50	628066X50	100	1,104
5X12	628065X12	100	0,218	6X60	628066X60	100	1,240



Embout (Bit) / Clé (Key) : voir chapitre / see chapter: Industrie