

Inox A2

62 808


TYPE DIN 7982 - (similar ISO 7050, NFE 25-656, UNI 6955)

VIS A TOLE TETE FRAISEE SIX LOBES INVIOLEABLE AVEC TETON CENTRAL

FLAT HEAD SIX LOBE SELF TAPPING SECURITY SCREWS WITH PIN

SENK SICHERUNGSBLECHSCHRAUBEN MIT INNENSECHSRUND

TORNILLOS DE SEGURIDAD INVIOLEABLES CABEZA AVELLANADA SEIS LOBULADOS CON ESPIGA

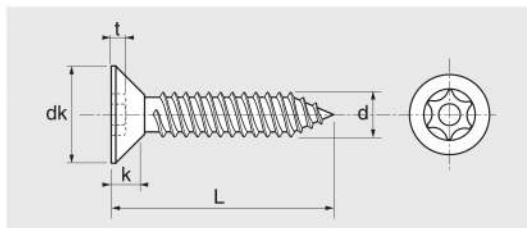

d	3,5 (6)	4,2 (8)	4,8 (10)
dk	7,7	8	10,3
k	3,05	3,3	4
t	1,6	1,6	2,54
embout/bit	3604515	3604520	3604525
clé/key	3608615	3608620	3608625

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
3,5X13	628083,5X13	100	0,099	4,2X25	628084,2X25	100	0,241
3,5X16	628083,5X16	100	0,115	4,2X32	628084,2X32	100	0,289
3,5X19	628083,5X19	100	0,132	4,2X38	628084,2X38	100	0,333
3,5X25	628083,5X25	100	0,168	4,8X13	628084,8X13	100	0,205
3,5X32	628083,5X32	100	0,236	4,8X19	628084,8X19	100	0,270
3,5X38	628083,5X38	100	0,231	4,8X25	628084,8X25	100	0,317
4,2X13	628084,2X13	100	0,149	4,8X32	628084,8X32	100	0,391
4,2X16	628084,2X16	100	0,153	4,8X38	628084,8X38	100	0,446
4,2X19	628084,2X19	100	0,201	4,8X50	628084,8X50	100	0,645



Embout (Bit) / Clé (Key) : voir chapitre / see chapter: Industrie