


**Inox A4****64 641****DIN 934 - (similar ISO 4032, NFE 25-401, UNI 5588)****ECROUS HEXAGONAUX LUBRIFIES**

WAXED HEXAGON NUTS

GESCHMIERTE SECHSKANTMUTTERN

TUERCAS HEXAGONALES LUBRIFICADAS

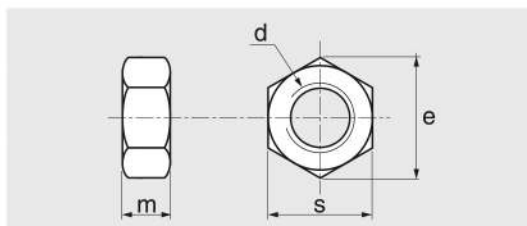

d nominal	Code	Pas	e	m	s	Cond.	kg/100
<b>M 6</b>	646416	1	11,05	5	10	200	0,251
<b>M 8</b>	646418	1,25	14,38	6,5	13	200	0,539

**ISO 4032**

Ø 10 S=16 - Ø 12 S=18 - Ø 14 S=21

<b>M 10</b>	6464110	1,5	18,9	8	17	100	1,185
<b>M 12</b>	6464112	1,75	21,1	10	19	100	1,761
<b>M 14</b>	6464114	2	24,49	11	22	50	2,517
<b>M 16</b>	6464116	2	26,75	13	24	50	3,381
<b>M 18</b>	6464118	2,5	29,56	15	27	50	4,757
<b>M 20</b>	6464120	2,5	32,95	16	30	25	6,333
<b>M 24</b>	6464124	3	39,55	19	36	25	9,800



Inox A4-80 du M5 au M24 inclus / A4-80 stainless steel from M5 to M24

Notre procédé améliore nettement le coefficient de frottement, ce qui réduit le risque de grippage


Our process really improves the coefficient of friction which reduces the risk of thread galling

**AISI 310****62 628****DIN 934 - (similar ISO 4032, NFE 25-401, UNI 5588)****ECROUS HEXAGONAUX POUR HAUTE TEMPERATURE**

HEXAGON NUTS FOR HIGH TEMPERATURE

SECHSKANTMUTTERN FÜR HÖHTEMperatur

TUERCAS HEXAGONALES PARA TEMPERATURA ALTA

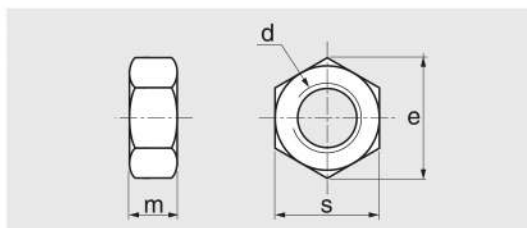

d nominal	Code	Pas	e	m	s	Cond.	kg/100
<b>M 6</b>	626286	1	11,05	5	10	100	0,251
<b>M 8</b>	626288	1,25	14,38	6,5	13	100	0,465
<b>M 10</b>	6262810	1,5	18,9	8	17	50	1,185
<b>M 12</b>	6262812	1,75	21,1	10	19	50	1,761
<b>M 16</b>	6262816	2	26,75	13	24	25	0,965
<b>M 20</b>	6262820	2,5	32,95	16	30	10	6,333
<b>M 24</b>	6262824	3	39,55	19	36	10	10,786