

POZIDRIVE PAN HEAD CHIPBOARD SCREWS REFERENCES 62306 (S.S. **A2**) AND 64306 (S.S. **A4**)

► FEATURES

Austenitic stainless steel A2 graded (62306) and A4 graded (64306)

Pan head, angle under head 45°

Cross-head mark Pozidrive type

Standard point (angle from 25° to 30°)

► APPLICATIONS



Any types of fixation on wood

Any type of assembly on wood

Facades, cladding, floor for frame...

Essential pre-drilling

► DIMENSIONS (mm)

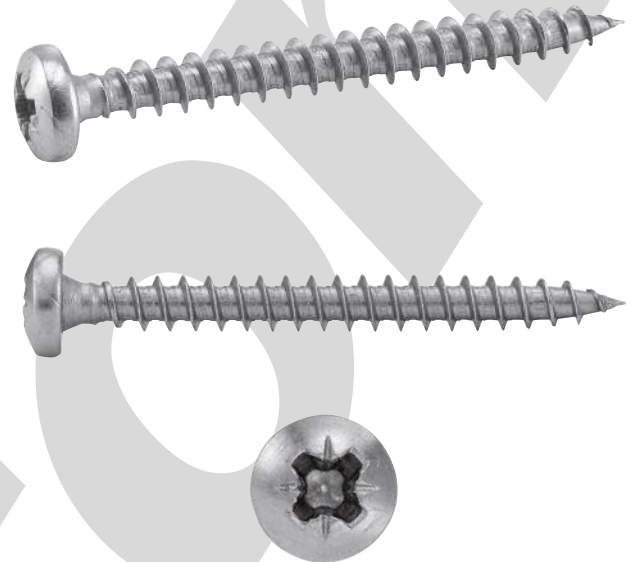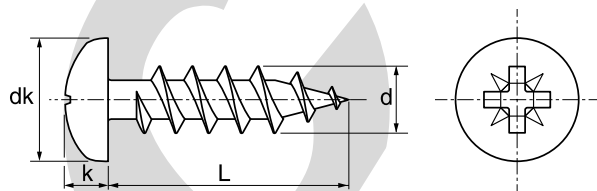

d	3	3,5	4	4,5	5	6
dk	5,8	6,8	7,8	8,8	9,8	11,8
k	2,3	2,4	2,8	3	3,5	4,2
PZ	1	2	2	2	2	3

UPDATE: APRIL 2019 - FT 306 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary too according to the condition of use of the product, the assembly environment and the purchaser needs.

► RANGE

STAINLESS STEEL A2

d x L	Product code	Packaging	Over-packaging	Weight kg/100
3X10	623063X10	200	7600	0,057
3X12	623063X12	200	7600	0,040
3X16	623063X16	200	7600	0,071
3X20	623063X20	200	7600	0,078
3X25	623063X25	200	7600	0,111
3X30	623063X30	200	7600	0,129
3,5X16	623063,5X16	200	7600	0,093
3,5X20	623063,5X20	200	7600	0,115
3,5X25	623063,5X25	200	7600	0,138
3,5X30	623063,5X30	200	7600	0,159
3,5X35	623063,5X35	200	3600	0,181
3,5X40	623063,5X40	200	3600	0,193
4X13	623064X13	200	7600	0,110
4X16	623064X16	200	7600	0,120
4X20	623064X20	200	7600	0,152
4X25	623064X25	200	3600	0,174
4X30	623064X30	200	3600	0,198
4X35	623064X35	200	3600	0,220
4X40	623064X40	200	3600	0,243
4X45	623064X45	200	1600	0,266
4X50	623064X50	200	1600	0,289
4X60	623064X60	200	1600	0,358
4X70	623064X70	200	1600	0,397
4,5X14	623064,5X14	200	7600	0,149
4,5X16	623064,5X16	200	7600	0,179
4,5X20	623064,5X20	200	7600	0,186
4,5X25	623064,5X25	200	3600	0,219
4,5X30	623064,5X30	200	3600	0,265
4,5X35	623064,5X35	200	3600	0,291
4,5X40	623064,5X40	200	1600	0,311
4,5X45	623064,5X45	200	1600	0,340
4,5X50	623064,5X50	200	1600	0,361
4,5X60	623064,5X60	200	1600	0,435
4,5X70	623064,5X70	200	800	0,502
5X20	623065X20	100	3800	0,266
5X25	623065X25	100	3800	0,327
5X30	623065X30	100	1800	0,336
5X35	623065X35	100	1800	0,370
5X40	623065X40	100	1800	0,382
5X45	623065X45	100	1800	0,450

UPDATE: APRIL 2019 - FT 306 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary too according to the condition of use of the product, the assembly environment and the purchaser needs.

► RANGE

STAINLESS STEEL A2

d x L	Product code	Packaging	Over-packaging	Weight kg/100
5X50	623065X50	100	1800	0,486
5X60	623065X60	100	800	0,560
5X70	623065X70	100	800	0,638
5X80	623065X80	100	800	0,686
5X100	623065X100	100	400	0,858
6X30	623066X30	100	1800	0,520
6X35	623066X35	100	1800	0,504
6X40	623066X40	100	1800	0,666
6X50	623066X50	100	800	0,741
6X60	623066X60	100	800	0,816
6X70	623066X70	100	800	0,908
6X80	623066X80	100	400	1,072
6X90	623066X90	100	400	1,11
6X100	623066X100	100	400	1,251
6X120	623066X120	100	400	1,484

STAINLESS STEEL A4

d x L	Product code	Packaging	Over-packaging	Weight kg/100
3X16	643063X16	200	7600	0,071
3X20	643063X20	200	7600	0,078
3,5X16	643063,5X16	200	7600	0,093
3,5X20	643063,5X20	200	7600	0,115
3,5X25	643063,5X25	200	7600	0,138
3,5X30	643063,5X30	200	7600	0,159
4X16	643064X16	200	7600	0,120
4X20	643064X20	200	7600	0,152
4X25	643064X25	200	3600	0,174
4X30	643064X30	200	3600	0,198
4X35	643064X35	200	3600	0,220
4X40	643064X40	200	3600	0,540
4X50	643064X50	200	1600	0,289
4,5X20	643064,5X20	200	7600	0,190
4,5X25	643064,5X25	200	3600	0,219
4,5X30	643064,5X30	200	3600	0,260
4,5X35	643064,5X35	200	3600	0,291
4,5X40	643064,5X40	200	1600	0,311
4,5X50	643064,5X50	200	1600	0,361
5X20	643065X20	100	3800	0,266
5X25	643065X25	100	3800	0,327

UPDATE: APRIL 2019 - FT 306 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary too according to the condition of use of the product, the assembly environment and the purchaser needs.

► RANGE

STAINLESS STEEL A4

d x L	Product code	Packaging	Over-packaging	Weight kg/100
5X30	643065X30	100	1800	0,336
5X35	643065X35	100	1800	0,370
5X40	643065X40	100	1800	0,382
5X50	643065X50	100	1800	0,486
5X60	643065X60	100	800	0,560
5X70	643065X70	100	800	0,638
6X30	643066X30	100	1800	0,520
6X35	643066X35	100	1800	0,504
6X40	643066X40	100	1800	0,666
6X50	643066X50	100	800	0,741
6X60	643066X60	100	800	0,816
6X70	643066X70	100	800	0,908
6X80	643066X80	100	400	1,072
6X100	643066X100	100	400	1,251

UPDATE: APRIL 2019 - FT 306 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary too according to the condition of use of the product, the assembly environment and the purchaser needs.