

SIX LOBES COUNTERSUNK HEAD DECKING SCREWS REFERENCE 62317 (AISI 410)

► FEATURES

Martensitic stainless steel C1 graded - AISI 410 type (magnetisable)

Lubricant coating, WAX type

Large raised head with double cone (angles 60° and 90°)

Ribs under head

Six lobes mark

Spiral thread - simple thread

Anti-splitting point - cutting point type (angle 30°)

► INSTALLATIONS

Hard wood patios: exotic wood, leafy wood

Wood outside floor for frame

Inappropriate for salt and/or chlorine environments

► INSTALLATION RULES

35 to 40 screws/m²


Screws installed at minimum 2 cm beside the slat

Essential pre-drilling



► DIMENSIONS (mm)

d	4	4,5	5
dk	8	9	10
k	3,70	4,40	4,65
TX	15	20	25

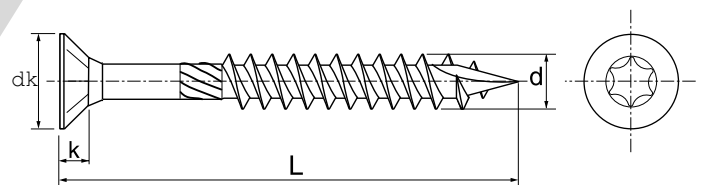

UPDATE: APRIL 2019 - FT 317 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary too according to the condition of use of the product, the assembly environment and the purchaser needs.

► RANGE

AISI 410

d x L	Product code	Packaging	Over-packaging	Weight kg/100
4,5X50	623174,5X50	200	1600	0,340
5X50	623175X50	200	1600	0,420
5X60	623175X60	200	1600	0,510
5X70	623175X70	100	800	0,600
5X80	623175X80	100	800	0,660

UPDATE: APRIL 2019 - FT 317 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary too according to the condition of use of the product, the assembly environment and the purchaser needs.