

SIX LOBES RAISED COUNTERSUNK HEAD DECKING SCREWS REFERENCE [62316](#) (AISI 410)

► FEATURES

Martensitic stainless steel C1 graded - AISI 410 type (magnetisable)

Lubricant coating, wax type

Thin raised countersunk head (angle 60°)

Ribs under head

Six lobes mark

Spiral thread

Simple thread

Anti-splitting point - cutting point type (angle 23-27°)

► INSTALLATIONS

Hard wood patios : exotic wood, leafy wood

Wood outside floor for frame

Inappropriate for salt and/or chlorine environments

► INSTALLATION RULES

35 to 40 screws/m²


Screws installed at minimum 2 cm beside the slat

Essential pre-drilling



► DIMENSIONS (mm)

d	4	4,5	5
dk	6,0	7,0	7,7
k	3,9	4,4	4,5
TX	15	20	25

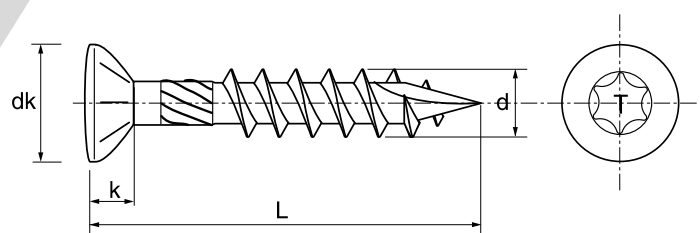

UPDATE: APRIL 2019 - FT 316 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary too according to the condition of use of the product, the assembly environment and the purchaser needs.

► RANGE

AISI 410

d x L	Product code	Packaging	Over-packaging	Weight kg/100
4X40	623164X40	200	3600	0,220
4,5X50	623164,5X50	200	1600	0,340
4,5X60	623164,5X60	200	1600	0,410
5X50	623165X50	200	1600	0,420
5X60	623165X60	200	1600	0,487
5X70	623165X70	100	800	0,600
5X80	623165X80	100	800	0,660

UPDATE: APRIL 2019 - FT 316 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary too according to the condition of use of the product, the assembly environment and the purchaser needs.