

SMALL COUNTERSUNK HEAD DECKING SCREWS WITH THIN THREAD REFERENCES 62327 (S.S. A2) AND 64327 (S.S. A4)

► FEATURES

Austenitic stainless steel A2 graded (62327)

Lubricant coating WAX

Thin countersunk head (angle 60°)

Ribs under head

6 lobes mark

Twin thread - spiral thread

Anti-splitting point - cutting point type (angle 23-28°)

► INSTALLATIONS

Patios in hard wood: exotic woods, leafy woods

Wood outside floor for frame

► INSTALLATION RULES


25 to 40 screws/m²

Screws installed at 2 cm minimum besides the slat

Essential pre-drilling

► DIMENSIONS (mm)

d	5	6
dk	7,5	9
k	4,5	5,4
TX	25	25

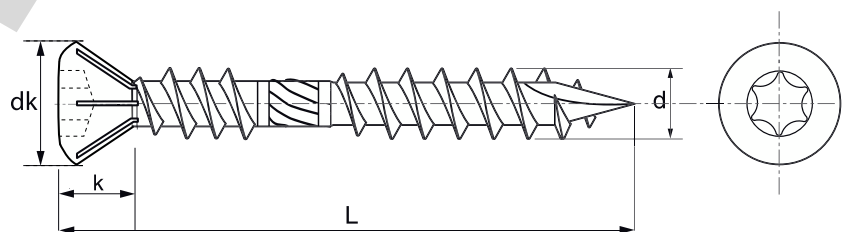

UPDATE: MAY 2019 - FT 327 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary too according to the condition of use of the product, the assembly environment and the purchaser needs.

► RANGE

STAINLESS STEEL A2

d x L	Product code	Packaging	Over-packaging	Weight kg/100
5X40	623275X40	200	1600	0,512
5X50	623275X50	200	1600	0,550
5X50	623275X50SEAU	400	1600	0,420
5X60	623275X60	200	1600	0,605
5X60	623275X60SEAU	400	1600	0,605
5X70	623275X70	100	800	0,600
5X70	623275X70SEAU	300	1200	0,600
5X80	623275X80	100	800	0,660
5X100	623275X100	100	400	1,000
6X60	623276X60	100	800	0,816
6X70	623276X70	100	400	0,910
6X80	623276X80	100	400	1,072

STAINLESS STEEL A4

d x L	Product code	Packaging	Over-packaging	kg/100
5X50	643275X50	200	-	0,550
5X50	643275X50SEAU	400	-	0,420
5X60	643275X60	200	-	0,605
5X60	643275X60SEAU	400	-	0,605
5X70	643275X70	100	-	0,600
5X70	643275X70SEAU	300	-	0,600

► BUCKETS



UPDATE: MAY 2019 - FT 327 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary too according to the condition of use of the product, the assembly environment and the purchaser needs.