


Inox A1

62850

## INSERT FILETE METAL

SELF TAPPING INSERT  
METAL GEWINDEEINSATZ  
INSERTO ROSCADO

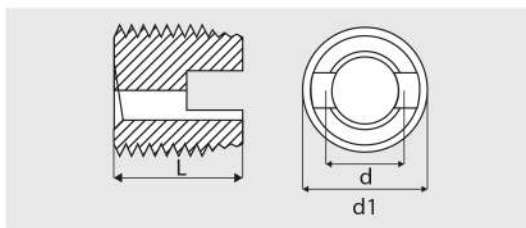

d	Code	d1	L	Pas ext.	Cond.	kg/100
3	628503	5	6	0,5	100	0,044
4	628504	6,5	8	0,75	100	0,089
5	628505	8	10	1	100	0,163
6	628506	10	14	1,5	50	0,349
8	628508	12	15	1,5	50	0,500
10	6285010	14	18	1,5	25	0,748
12	6285012	16	22	1,5	25	1,141
16	6285016	20	22	1,5	10	1,477


iInfo+	Filetage intérieur	M3	M4	M5	M6	M8	M10	M12	M16
	Diamètre de perçage-matières tendres	4,5-4,6	5,8-5,9	7,1-7,2	8,6-8,8	10,6-10,8	12,6-12,8	14,6-14,8	18,6-18,8
	Diamètre de perçage-matières dures	4,6-4,7	8-8,1	7,3-7,5	8,9-9,2	10,9-11,2	12,9-13,2	14,9-15,2	18,9-19,2
	Profondeur minimum du trou	8	10	13	17	18	22	26	27

Inox A1

62851

## INSERT FILETE BOIS

SELF TAPPING INSERT FOR WOOD  
GEWINDEEINSATZ FÜR HOLZ  
INSERTO ROSCADO PARA MADERA

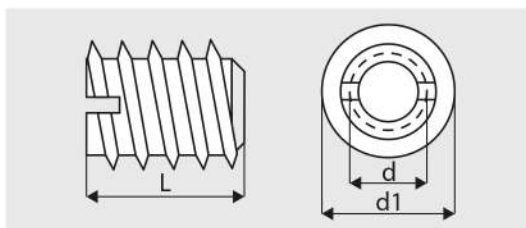

d	Code	d1	L	Cond.	kg/100
4	628514	8	10	50	0,144
5	628515	10	12	50	0,301
6	628516	12	15	50	0,610
8	628518	14	15	25	0,900
10	6285110	16	18	25	1,213