

Laiton

54 500


DIN 963 - (similar ISO 2009, NFE 25-123, UNI 6109)

## VIS A METAUX TETE FRAISEE FENDUE

SLOTTED COUNTERSUNK HEAD MACHINE SCREWS - BRASS

SENKSCRAUBEN MIT SCHLITZ - MESSING

TORNILLOS CABEZA AVELLANADA RANURADA - LATON

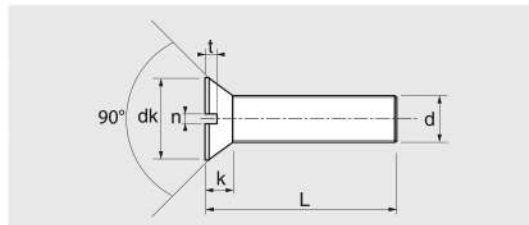

| d   | M 3  | M 4 | M 5 | M 6 | M 8  |
|-----|------|-----|-----|-----|------|
| dk  | 5,6  | 7,5 | 9,2 | 11  | 14,5 |
| k   | 1,65 | 2,2 | 2,5 | 3   | 4    |
| n   | 0,8  | 1   | 1,2 | 2   | 2    |
| t   | 0,6  | 0,8 | 1   | 1,2 | 1,6  |
| Pas | 0,5  | 0,7 | 0,8 | 1   | 1,25 |

| d x L | Code      | Cond. | kg/100 | d x L | Code      | Cond. | kg/100 |
|-------|-----------|-------|--------|-------|-----------|-------|--------|
| 3X10  | 545003X10 | 100   | 0,057  | 5X50  | 545005X50 | 100   | 0,720  |
| 3X16  | 545003X16 | 100   | 0,090  | 6X20  | 545006X20 | 100   | 0,438  |
| 3X20  | 545003X20 | 100   | 0,110  | 6X25  | 545006X25 | 100   | 0,506  |
| 3X25  | 545003X25 | 100   | 0,133  | 6X30  | 545006X30 | 100   | 0,660  |
| 3X30  | 545003X30 | 100   | 0,157  | 6X40  | 545006X40 | 100   | 0,850  |
| 4X16  | 545004X16 | 100   | 0,167  | 6X50  | 545006X50 | 50    | 1,050  |
| 4X20  | 545004X20 | 100   | 0,200  | 6X60  | 545006X60 | 50    | 1,250  |
| 4X25  | 545004X25 | 100   | 0,240  | 8X20  | 545008X20 | 100   | 0,846  |
| 4X30  | 545004X30 | 100   | 0,284  | 8X25  | 545008X25 | 100   | 1,046  |
| 4X40  | 545004X40 | 100   | 0,360  | 8X30  | 545008X30 | 100   | 1,203  |
| 5X16  | 545005X16 | 100   | 0,266  | 8X35  | 545008X35 | 100   | 1,362  |
| 5X20  | 545005X20 | 100   | 0,320  | 8X40  | 545008X40 | 100   | 1,515  |
| 5X25  | 545005X25 | 100   | 0,380  | 8X45  | 545008X45 | 100   | 1,758  |
| 5X30  | 545005X30 | 100   | 0,450  | 8X50  | 545008X50 | 100   | 1,942  |
| 5X40  | 545005X40 | 100   | 0,580  |       |           |       |        |