

Laiton

56 200


DIN 96 - (NFE 25-606, UNI 701)

VIS A BOIS TETE RONDE FENDUE

SLOTTED ROUND HEAD WOOD SCREWS - BRASS

HOLZSCHRAUBEN HALBRUNDKOPF MIT SCHLITZ - MESSING

TORNILLOS PARA MADERA CABEZA REDONDA RANURADA - LATON

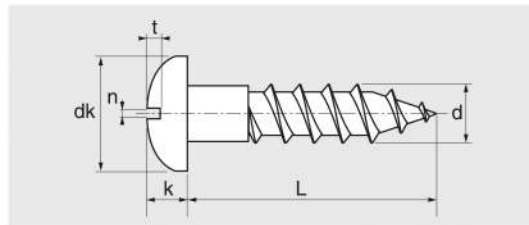

d	2,5	3	3,5	4	4,5	5
dk	5	6	7	8	9	10
k	1,7	2,1	2,4	2,8	3,1	3,5
t	0,85	1,05	1,2	1,4	1,55	1,75
n	0,6	0,8	0,8	1	1	1,2

d x L	Code	Cond.	kg/100
2,5X12	562002,5X12	500	0,044
2,5X16	562002,5X16	500	0,057
2,5X20	562002,5X20	500	0,069
2,5X25	562002,5X25	500	0,084
3X12	562003X12	100	0,065
3X16	562003X16	100	0,082
3X20	562003X20	100	0,094
3X25	562003X25	100	0,117
3X30	562003X30	100	0,14
3,5X12	562003,5X12	100	0,086
3,5X16	562003,5X16	100	0,109
3,5X20	562003,5X20	100	0,13
3,5X25	562003,5X25	100	0,164
3,5X30	562003,5X30	100	0,19
3,5X40	562003,5X40	100	0,247
3,5X50	562003,5X50	100	0,31
4X16	562004X16	100	0,141

d x L	Code	Cond.	kg/100
4X20	562004X20	100	0,172
4X25	562004X25	100	0,205
4X30	562004X30	100	0,241
4X40	562004X40	100	0,31
4X50	562004X50	100	0,38
4,5X20	562004,5X20	100	0,218
4,5X25	562004,5X25	100	0,27
4,5X30	562004,5X30	100	0,305
4,5X40	562004,5X40	100	0,4
4,5X50	562004,5X50	100	0,49
5X20	562005X20	100	0,28
5X25	562005X25	100	0,33
5X30	562005X30	100	0,38
5X40	562005X40	100	0,51
5X50	562005X50	100	0,608
5X60	562005X60	100	0,73