

Inox A2

62 222


DIN 7500 CZ - (tête selon ISO7045)

VIS AUTOTARAUDEUSES TETE CYLINDRIQUE POZIDRIVE

POZIDRIVE PAN HEAD THREAD ROLLING SCREWS

POZIDRIVE GEWINDEFURCHENDE LINSCHRAUBEN

TORNILLOS AUTOROSCANTES CABEZA CILÍNDRICA POZIDRIVE

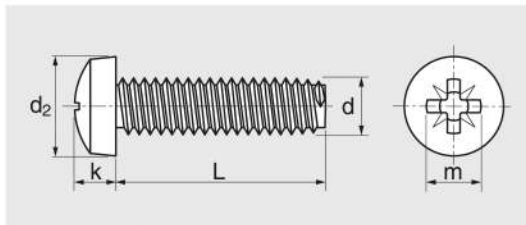

d	M 2,5	M 3	M 4	M 5	M 6
d2	5	5,6	8	9,5	12
k	2,1	2,4	3,1	3,8	4,6
m	2,6	3	4,3	5	6,7
⌀	1	1	2	2	3
Pas	0,45	0,5	0,7	0,8	1

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
2,5X5	622222,5X5	500	0,042	4X20	622224X20	200	0,253
2,5X6	622222,5X6	500	0,045	4X25	622224X25	200	0,291
2,5X8	622222,5X8	500	0,051	4X30	622224X30	200	0,328
2,5X10	622222,5X10	500	0,057	5X8	622225X8	200	0,277
2,5X12	622222,5X12	500	0,063	5X10	622225X10	200	0,301
3X5	622223X5	200	0,060	5X12	622225X12	200	0,326
3X6	622223X6	200	0,064	5X16	622225X16	200	0,374
3X8	622223X8	200	0,073	5X20	622225X20	200	0,422
3X10	622223X10	200	0,081	5X25	622225X25	200	0,482
3X12	622223X12	200	0,090	5X30	622225X30	200	0,542
3X16	622223X16	200	0,107	6X10	622226X10	200	0,524
3X20	622223X20	200	0,124	6X12	622226X12	200	0,558
4X6	622224X6	200	0,148	6X16	622226X16	200	0,627
4X8	622224X8	200	0,163	6X20	622226X20	200	0,696
4X10	622224X10	200	0,178	6X25	622226X25	200	0,781
4X12	622224X12	200	0,193	6X30	622226X30	200	0,867
4X16	622224X16	200	0,223				

Taraude seulement l'aluminium / Only tap aluminium

Avant trou (mm) :

M2,5 = 2,25 - 2,30

M3 = 2,70 - 2,75

M4 = 3,60 - 3,70

M5 = 4,50 - 4,65

M6 = 5,40 - 5,55

i+
Info