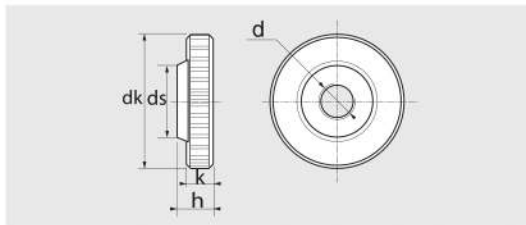


Inox A1

**62627**  
 DIN 467 - (UNI 6603)


**ECROUS MOLETES TYPE BAS**

 KNURLED THUMB NUTS THIN TYPE  
 RÄNDELMUTTERN NIEDRIGE FORM  
 TUERCAS MOLETEADAS FORMA BAJA


d nominal	Code	Pas	dk	ds	h	k	Cond.	kg/100
M 2,5	626272,5	0,45	11	5	3	2,5	100	0,190
M 3	626273	0,5	12	6	3	2,5	50	0,220
M 4	626274	0,7	16	8	4	3,5	50	0,541
M 5	626275	0,8	20	10	5	4	25	0,986
M 6	626276	1	24	12	6	5	25	1,760
M 8	626278	1,25	30	16	8	6	25	3,390
M 10	6262710	1,5	36	20	10	8	10	6,380

Inox A2

**62612**
**ECROUS INVOLABLES AUTOCASSANTS**

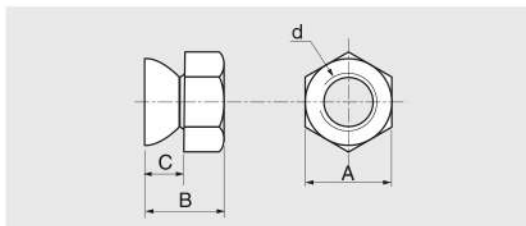 SELF-BREAKING LOCK NUTS  
 ZERBRECHLICHMUTTERN  
 TUERCAS DE SEGURIDAD INVOLABLES


d nominal	Code	Pas	N	A	B	C	Cond.	kg/100
M 5	626125	0,8	6 - 12	8	9,2	4,7	200	0,150
M 6	626126	1	7 - 18	10	9,5	5,5	200	0,305
M 8	626128	1,25	13 - 25	13	12	6	100	0,632
M 10	6261210	1,5	30 - 40	17	15	7,5	50	1,393
M 12	6261212	1,75	35 - 45	19	16	8	50	1,529
M 14	6261214	2	50 - 60	22	20	9	25	2,644
M 16	6261216	2	45 - 60	24	22	10,5	25	3,173



N = Couple de rupture en Nm / Breaking torque in Nm