


**Inox A4****64 301****DIN 95 - (NFE 25-605, UNI 703)****VIS A BOIS TETE FRAISEE BOMBEE FENDUE**

SLOTTED RAISED COUNTERSUNK HEAD WOOD SCREWS

HOLZSCHRAUBEN LINSSENKOPF MIT SCHLITZ

TORNILLOS PARA MADERA CABEZA AVELLANADA ABOMBADA RANURADA

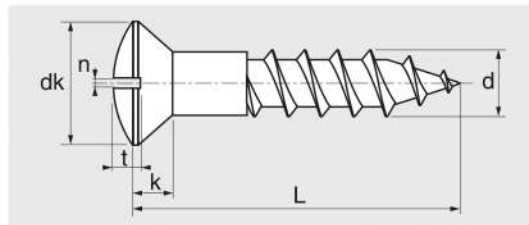

d	2,5	3	3,5	4	4,5	5	6
dk	4,7	5,6	6,5	7,5	8,3	9,2	11
k	1,5	1,65	1,93	2,2	2,35	2,5	3
t (min)	1	1,2	1,4	1,6	1,8	2	2,4
n	0,6	0,8	0,8	1	1	1,2	1,6

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
2,5X12	643012,5X12	500	0,033	4,5X20	643014,5X20	200	0,206
2,5X16	643012,5X16	500	0,043	5X20	643015X20	200	0,264
2,5X20	643012,5X20	500	0,052	5X25	643015X25	200	0,316
3X12	643013X12	200	0,056	5X30	643015X30	200	0,368
3X16	643013X16	200	0,070	5X35	643015X35	200	0,420
3X20	643013X20	200	0,084	5X40	643015X40	200	0,472
3X25	643013X25	200	0,102	5X50	643015X50	200	0,575
3X30	643013X30	200	0,119	5X60	643015X60	200	0,679
3,5X12	643013,5X12	200	0,068	5X70	643015X70	100	0,783
3,5X16	643013,5X16	200	0,087	6X20	643016X20	200	0,374
3,5X20	643013,5X20	200	0,106	6X25	643016X25	200	0,450
3,5X25	643013,5X25	200	0,130	6X30	643016X30	200	0,525
3,5X30	643013,5X30	200	0,154	6X35	643016X35	200	0,601
4X16	643014X16	200	0,136	6X40	643016X40	200	0,676
4X20	643014X20	200	0,162	6X45	643016X45	200	0,752
4X25	643014X25	200	0,194	6X50	643016X50	200	0,827
4X30	643014X30	200	0,226	6X60	643016X60	100	0,978
4X35	643014X35	200	0,259	6X70	643016X70	100	1,129
4X40	643014X40	200	0,291	6X80	643016X80	100	1,280
4X50	643014X50	200	0,356				