

Nylon 6.6

82 100


TYPE DIN 963 - (similar ISO 2009, NFE 25-123, UNI 6109)

VIS TETE FRAISEE FENDUE

SLOTTED COUNTERSUNK HEAD SCREWS

SENKSCRAUBEN MIT SCHLITZ

TORNILLOS CABEZA AVELLANADA RANURADA

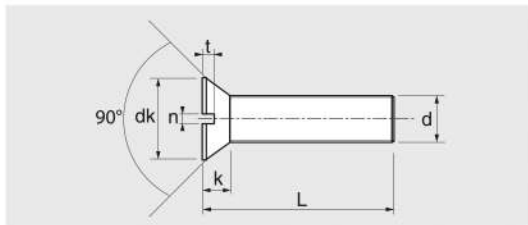

d	M 3	M 4	M 5	M 6	M 8	M 10
dk	5,3	7,14	9,2	11	14,5	18
k	1,65	2,2	2,5	3	4	5
n	0,8	1	1,2	1,6	2	2,5
t (min)	0,6	0,8	1	1,2	1,6	2
Pas	0,5	0,7	0,8	1	1,25	1,5

d x L	Code	Cond.	kg/1000	d x L	Code	Cond.	kg/1000
3X10	821003X10	200	0,081	6X10	821006X10	200	0,341
3X12	821003X12	200	0,094	6X12	821006X12	200	0,383
3X16	821003X16	200	0,120	6X16	821006X16	200	0,490
3X20	821003X20	200	0,140	6X20	821006X20	200	0,588
4X10	821004X10	200	0,146	6X25	821006X25	200	0,720
4X12	821004X12	200	0,162	6X30	821006X30	200	0,830
4X16	821004X16	200	0,196	6x40	821006X40	200	1,030
4X20	821004X20	200	0,241	8X20	821008X20	100	1,054
4X25	821004X25	200	0,354	8X25	821008X25	100	1,310
4X30	821004X30	200	0,348	8X30	821008X30	100	1,500
5X10	821005X10	200	0,249	8X40	821008X40	100	2,060
5X12	821005X12	200	0,289	8X50	821008X50	100	2,481
5X16	821005X16	200	0,362	10X20	8210010X20	100	1,700
5X20	821005X20	200	0,447	10X25	8210010X25	100	2,000
5X25	821005X25	200	0,500	10X30	8210010X30	100	2,400
5X30	821005X30	200	0,554	10X40	8210010X40	100	3,045
5X40	821005X40	200	0,720	10X50	8210010X50	50	3,620



Cet article fait référence à la DIN 963 et ISO 2009 mais la matière P6.6 n'est pas couverte par ces normes
This item refers to DIN 963 and ISO 2009 but P6.6 material is not guaranteed by norms

