

Nylon 6.6

82 500


TYPE DIN 84 - (similar ISO 1207, NFE 25-127, UNI 6107)

VIS TETE CYLINDRIQUE FENDUE

SLOTTED CHEESE HEAD SCREWS

ZYLINDERSCHRAUBEN MIT SCHLITZ

TORNILLOS CABEZA CILINDRICA RANURADA

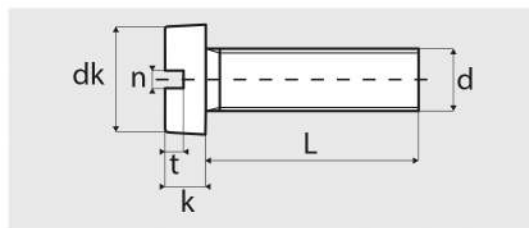

d	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10
dk	4,5	5,5	7	8,5	10	13	16
k	1,6	2	2,6	3,3	3,9	5	6
n	0,6	0,8	1,2	1,2	1,6	2	2,5
t (min)	0,7	0,85	1,1	1,3	1,6	2	2
Pas	0,45	0,5	0,7	0,8	1	1,25	1,5

d x L	Code	Cond.	kg/1000	d x L	Code	Cond.	kg/1000
2,5X6	825002,5X6	500	0,047	5X20	825005X20	200	0,498
2,5X8	825002,5X8	500	0,050	5X25	825005X25	200	0,564
2,5X10	825002,5X10	500	0,065	5X30	825005X30	200	0,689
3X5	825003X5	200	0,080	5X40	825005X40	200	0,857
3X6	825003X6	200	0,082	6X10	825006X10	200	0,500
3X8	825003X8	200	0,090	6X12	825006X12	200	0,562
3X10	825003X10	200	0,102	6X16	825006X16	200	0,661
3X12	825003X12	200	0,115	6X20	825006X20	200	0,743
3X16	825003X16	200	0,139	6X25	825006X25	200	0,858
3X20	825003X20	200	0,161	6X30	825006X30	200	0,996
3X30	825003X30	200	0,219	6X40	825006X40	200	1,226
4X8	825004X8	200	0,188	6X50	825006X50	100	1,459
4X10	825004X10	200	0,196	8X20	825008X20	100	1,441
4X12	825004X12	200	0,218	8X25	825008X25	100	1,646
4X16	825004X16	200	0,261	8X30	825008X30	100	1,870
4X20	825004X20	200	0,298	8X40	825008X40	100	2,283
4X25	825004X25	200	0,355	8X50	825008X50	100	2,283
4X30	825004X30	200	0,387	10X20	825010X20	50	2,495
4X40	825004X40	200	0,501	10X25	825010X25	50	2,495
5X8	825005X8	200	0,287	10X30	825010X30	50	3,290
5X10	825005X10	200	0,322	10X40	825010X40	50	4,400
5X12	825005X12	200	0,357	10X50	825010X50	50	5,470
5X16	825005X16	200	0,422				



Cet article fait référence à la DIN 84 et ISO 1207 mais la matière P6.6 n'est pas couverte par ces normes
This item refers to DIN 84 and ISO 1207 but P6.6 material is not guaranteed by norms