

## POZIDRIVE COUNTERSUNK HEAD CHIPBOARD SCREWS REFERENCES 62305 (S.S. A2) AND 64305 (S.S. A4)

### ► FEATURES

Austenitic stainless steel A2 graded (62305) and A4 graded (64305)

Countersunk head with double cone (45° and 90° angles)

Cross-head mark Pozidrive type

Standard point (angle from 25° to 30°)

### ► INSTALLATIONS



Any types of fixation on wood

Any types of assembly on wood

Facades, cladding, floor for frame...

Essential pre-drilling

### ► DIMENSIONS (mm)

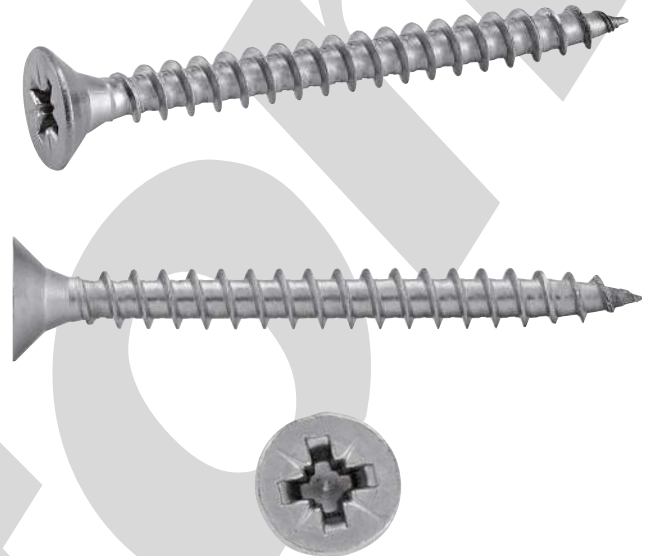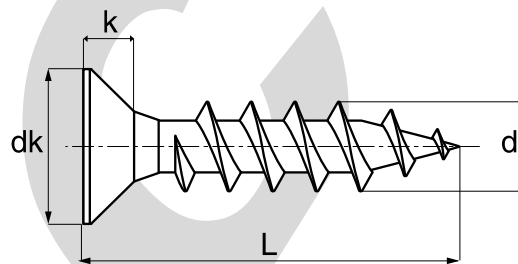

<b>d</b>	2,5	3	3,5	4	4,5	5	6
<b>dk</b>	5	6	7	8	9	10	12
<b>k</b>	1,7	1,9	2,1	2,5	2,7	3	3,6
<b>PZ</b>	1	1	2	2	2	2	3

**UPDATE: APRIL 2019 - FT 305 19 V3 GB**

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary according to the condition of use of the product, the assembly environment and the purchaser needs.

► RANGE

## STAINLESS STEEL A2

d x L	Product code	Packaging	Over-packaging	Weight kg/100
2,5X12	623052,5X12	200	20000	0,043
2,5X16	623052,5X16	200	20000	0,055
2,5X20	623052,5X20	200	20000	0,067
3X10	623053X10	200	7600	0,026
3X12	623053X12	200	7600	0,058
3X16	623053X16	200	7600	0,054
3X20	623053X20	200	7600	0,068
3X25	623053X25	200	7600	0,083
3X30	623053X30	200	7600	0,098
3X35	623053X35	200	7600	0,098
3X40	623053X40	200	3600	0,125
3,5X12	623053,5X12	200	7600	0,060
3,5X16	623053,5X16	200	7600	0,074
3,5X20	623053,5X20	200	7600	0,086
3,5X25	623053,5X25	200	7600	0,105
3,5X30	623053,5X30	200	3600	0,124
3,5X35	623053,5X35	200	3600	0,175
3,5X40	623053,5X40	200	3600	0,162
4X12	623054X12	200	7600	0,078
4X16	623054X16	200	7600	0,100
4X20	623054X20	200	7600	0,124
4X25	623054X25	200	7600	0,145
4X30	623054X30	200	3600	0,168
4X35	623054X35	200	3600	0,190
4X40	623054X40	200	3600	0,212
4X45	623054X45	200	1600	0,234
4X50	623054X50	200	1600	0,300
4X60	623054X60	200	1600	0,322
4X70	623054X70	200	1600	0,444
4X80	623054X80	200	800	0,488
4,5X16	623054,5X16	200	7600	0,140
4,5X20	623054,5X20	200	7600	0,150
4,5X25	623054,5X25	200	3600	0,170
4,5X30	623054,5X30	200	3600	0,208
4,5X35	623054,5X35	200	3600	0,246
4,5X40	623054,5X40	200	3600	0,284
4,5X45	623054,5X45	200	1600	0,360
4,5X50	623054,5X50	200	1600	0,325
4,5X60	623054,5X60	200	1600	0,389
4,5X70	623054,5X70	200	800	0,588

UPDATE: APRIL 2019 - FT 305 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary according to the condition of use of the product, the assembly environment and the purchaser needs.

► RANGE

## STAINLESS STEEL A2

d x L	Product code	Packaging	Over-packaging	Weight kg/100
4,5X80	623054,5X80	200	800	0,664
5X20	623055X20	200	7600	0,206
5X25	623055X25	200	3600	0,245
5X30	623055X30	200	3600	0,282
5X35	623055X35	200	3600	0,320
5X40	623055X40	200	1600	0,358
5X45	623055X45	200	1600	0,396
5X50	623055X50	200	1600	0,434
5X60	623055X60	200	1600	0,510
5X70	623055X70	200	800	0,588
5X80	623055X80	100	800	0,666
5X90	623055X90	100	400	0,744
5X100	623055X100	100	400	0,822
6X20	623056X20	100	3800	0,270
6X25	623056X25	100	3800	0,330
6X30	623056X30	100	1800	0,444
6X35	623056X35	100	1800	0,504
6X40	623056X40	100	1800	0,556
6X45	623056X45	100	800	0,610
6X50	623056X50	100	800	0,669
6X60	623056X60	100	800	0,781
6X70	623056X70	100	800	0,893
6X80	623056X80	100	400	1,005
6X90	623056X90	100	400	1,117
6X100	623056X100	100	400	1,229

## STAINLESS STEEL A4

d x L	Product code	Packaging	Over-packaging	Weight kg/100
3X10	643053X10	200	7600	0,026
3X12	643053X12	200	7600	0,058
3X16	643053X16	200	7600	0,054
3X20	643053X20	200	7600	0,068
3X25	643053X25	200	7600	0,083
3X30	643053X30	200	7600	0,098
3X35	643053X35	200	7600	0,098
3X40	643053X40	200	3600	0,125
3,5X16	643053,5X16	200	7600	0,067
3,5X20	643053,5X20	200	7600	0,086
3,5X25	643053,5X25	200	7600	0,105

UPDATE: APRIL 2019 - FT 305 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary according to the condition of use of the product, the assembly environment and the purchaser needs.

► RANGE

## STAINLESS STEEL A4

d x L	Product code	Packaging	Over-packaging	Weight kg/100
3,5X30	643053,5X30	200	3600	0,124
3,5X35	643053,5X35	200	3600	0,143
3,5X40	643053,5X40	200	3600	0,162
4X12	643054X12	200	7600	0,080
4X16	643054X16	200	7600	0,100
4X20	643054X20	200	7600	0,124
4X25	643054X25	200	7600	0,145
4X30	643054X30	200	3600	0,168
4X35	643054X35	200	3600	0,190
4X40	643054X40	200	3600	0,212
4X45	643054X45	200	1600	0,234
4X50	643054X50	200	1600	0,300
4X60	643054X60	200	1600	0,322
4X70	643054X70	200	1600	0,444
4,5X20	643054,5X20	200	7600	0,150
4,5X25	643054,5X25	200	3600	0,170
4,5X30	643054,5X30	200	3600	0,208
4,5X35	643054,5X35	200	3600	0,246
4,5X40	643054,5X40	200	1600	0,284
4,5X45	643054,5X45	200	1600	0,360
4,5X50	643054,5X50	200	1600	0,325
4,5X60	643054,5X60	200	1600	0,389
4,5X70	643054,5X70	200	800	0,588
5X20	643055X20	200	7600	0,206
5X25	643055X25	200	3600	0,245
5X30	643055X30	200	3600	0,282
5X35	643055X35	200	3600	0,320
5X40	643055X40	200	1600	0,358
5X45	643055X45	200	1600	0,396
5X50	643055X50	200	1600	0,434
5X60	643055X60	200	1600	0,510
5X65	643055X65	200	1600	0,540
5X70	643055X70	200	800	0,588
5X80	643055X80	100	800	0,666
5X90	643055X90	100	400	0,744
5X100	643055X100	100	400	0,822
6X30	643056X30	100	1800	0,444
6X35	643056X35	100	1800	0,504
6X40	643056X40	100	1800	0,556
6X45	643056X45	100	800	0,608

UPDATE: APRIL 2019 - FT 305 19 V3 GB

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary according to the condition of use of the product, the assembly environment and the purchaser needs.

► RANGE

## STAINLESS STEEL A4

d x L	Product code	Packaging	Over-packaging	Weight kg/100
6X50	643056X50	100	800	0,669
6X60	643056X60	100	800	0,781
6X70	643056X70	100	400	0,893
6X80	643056X80	100	400	1,005
6X90	643056X90	100	400	1,117
6X100	643056X100	100	400	1,229
6X120	643056X120	100	400	1,453
6X120/60	643056X120/60	100	400	1,453
6X140/70	643056X140/70	100	400	1,677

**UPDATE: APRIL 2019 - FT 305 19 V3 GB**

Technical information, sketches and pictures are provided for guidance purposes only and are not contractual. Some of them might vary according to the profession tolerances and to the applicable standards. The instruction of use, assembly and maintenance are only recommendations. They can vary according to the condition of use of the product, the assembly environment and the purchaser needs.